

Pure freedom

The M1 is a reliable and durable power wheelchair with a low seat height, three power function options, and flip-up lockable armrests. Powered by the Permobil battery system, so you can drive safely and comfortably to where you need to be.

Quality backrest options

Select from a variety of positioning options fitting a tubular backrest from a simple curved back to the more advanced Comfort Acta-Back®, Acta-Relief™ and ROHO® AGILITY® Max Contour.

More drivability

The new Permobil battery and Permobil VoltPro charger work together to provide you with up to 25% greater driving distance, optimized charging times and longer battery life.

Power recline

Power recline changes the angle of the back at the touch of a button. This redistributes pressure for increased comfort and sitting tolerance while making it easy to adopt a relaxing position.

Power tilt

The power tilt option allows tilting the seat up to 50° to promote a resting position or pressure distribution. Tilt can also be used to improve comfort, trunk stability and head control.

Power elevating leg rest option


Provides the possibility to change position easily for more comfort. It may also contribute to improved lower extremity circulation.

Comfortable reliable drivability

Smooth suspension helps to reduce vibration and a low center of gravity with mid-wheel traction means you can drive in comfort for longer. Adaptable seating accommodates postural or functional changes over time.

Compact and transportable

A compact footprint and a foldable backrest option with the EZ-fold funciton to save space when storing or transporting your M1.

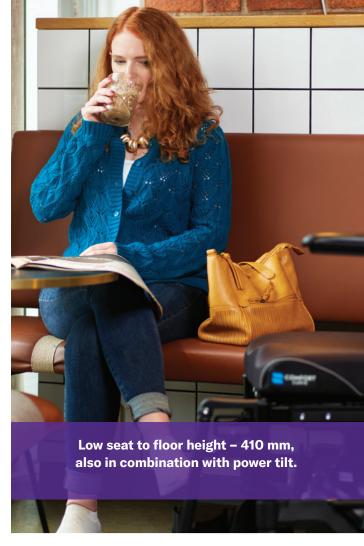



Power recline, 85-135°, redistributes pressure for increased comfort and sitting tolerance.

Max. speed

Electronics

8 km/h (6 km/h option)

VR2 90A (option RNET 90A)

Range (G34: 65Ah batteries)40 km*Max. user weight136 kgObstacle climbing (with run up)50 (75 mm)Min. turning diameter1120 mmPivot width1100 mm

Suspension Smooth

Width incl. seat 610-790 mm
Height 970-1170 mm
Stowage length/height 670 mm/820 mm

Weight incl. batteries 65 Ah 144 kg
Seat to floor height (excl. cushion) 410 mm

Seat to floor height options (excl. cushion) 410 mm; 435 mm; 460 mm

Seat and backrest** width

Seat depth

360–560 mm (50 mm increments)

Backrest height (excl. seat cushion) seat width 360 mm

455–640 mm (25 mm increments)

Backrest height (excl. seat cushion) seat width >360 mm

555–740 mm (25 mm increments)

Armrest height 180–360 mm

Distance between armrests 380-480/480-580 mm

Backrest angle adjustment (manual) 85°–110°
Seat plane adjustment – Anterior/posterior tilt 90° to 140°

Crash test ISO 7176-19 – 4-point tie -down Yes – max. 136 kg user weight

610 mm

Tested according to EN12182/EN12184 Yes



Power recline 85 – 135°



Posterior tilt 0 - 50°



Power leg rest 80°-140° (>480 mm seat depth) 90°-150° (≤480 mm seat depth) Manual leg rest 80°-135°



Swing away leg rest 100°-115° manally adjustmable and removable







ersonalise your ride









990 mm

^{*}Driving conditions and choice of battery type.

^{**}Tubular backrest



